



SD Series

Shipping Scale



165lb and 440lb models available with large platform



The OHAUS SD Shipping Scale – Portability, Durability, Quality and Value

The OHAUS SD is a robust portable bench scale designed specifically with affordability, utility and every-day usage in mind. Ideal for home office, mail room, shipping and receiving, and general commercial and industrial weighing applications, the model SD features durable painted steel treaded and non-treaded platforms, a remote indicator with two tactile function keys, battery operation and flexible mounting capabilities. The OHAUS model SD is your efficient solution to a variety of weighing needs, when you need it, where you need it.

Standard Features Include:

- Modes for weighing and dynamic weighing
- 3 popular capacity models: 77lb/35kg, 165lb/75kg, 440lb/200kg
- 2 platform sizes: 12.4 x 11 inches and 20.5 x 15.7 inches
- Maximum displayed resolutions from 1:1,750 to 1:2,200
- ABS plastic indicator housing with reinforced ribs
- Universal table/wall mounting brackets included
- Flexible coiled cable, extendable to 108 inches
- Painted steel platforms with raised embossed treads (SD35, SD75 and SD200 models)
- Rubber feet (adjustable on SD75L and SD200L models)
- LCD with fast weight display in lb or kg
- Raised tactile keys
- AC adapter (included) or 360 hour battery operation with Auto-Shut Off feature
- Calibration in lb or kg

SD Series Shipping Scale

Specifications

| Model | SD35 | SD75 | SD200 | SD75L | SD200L |
|---------------------------------|--|--------------------------------|--------------------------------|--|--------------------------------|
| Capacity x Readability | 77lb x 0.05lb 35kg x 0.02kg | 165lb x 0.1lb 75kg x 0.05kg | 440lb x 0.2lb 200kg x 0.1kg | 165lb x 0.1lb 75kg x 0.05kg | 440lb x 0.2lb 200kg x 0.1kg |
| Maximum Displayed Resolution | 1:1750 | 1:1650 | 1:2200 | 1:1650 | 1:2200 |
| Calibration Weights (fixed)* | 50lb / 25kg | 100lb / 50kg | 200lb / 100kg | 100lb / 50kg | 200lb / 100kg |
| Base Size | 12.4"L x 11"W x 1.77"H / 316L x 280W x 45H mm | | | 20.5"L x 15.7"W x 3"H / 520L x 400W x 75H mm | |
| Construction | ABS plastic indicator housing and mounting brackets Painted steel base with raised, embossed tread pan (non-L models) Rubber feet (adjustable on L models) | | | | |
| Weighing Units | kg, lb | | | | |
| Application Modes | Weigh, dynamic weighing / display hold | | | | |
| Display | 4-digit, 7-segment LCD, 0.8" / 20mm high, | | | | |
| Keyboard | 2 function raised tactile mechanical switches: [ON/OFF Zero] / [UNITS Cal] | | | | |
| Stabilization Time | ≤ 3 seconds | | | | |
| Cable Length | Extendable 72" to 108" / 1.8m to 2.7m (full extension) | | | | |
| Operating Temperature | 41° to 104°F / 5° to 40°C / 10%-80% relative humidity, non-condensing | | | | |
| Power | 9V DC/100mA AC Adapter (included), or 3 "C" alkaline batteries (not included) | | | | |
| Battery Operating Time | 360 hours | | | | |
| Auto-Shut Off | 4 minutes with no activity (battery operation only) | | | | |
| Safe Overload Capacity | 150% of capacity | | | | |
| Indicator Size (L x W x H) | 8.27 x 3.58 x 1.54 in / 210 x 91 x 39 mm | | | | |
| Shipping Dimensions (L x W x H) | 15 x 3.94 x 18.3 in / 380 x 100 x 465 mm | | | 24 x 19 x 9 in / 600 x 480 x 230 mm | |
| Net Weight | 5.8 lb / 2.6kg | 7.3lb / 3.3kg | | 31lb / 14kg | |
| Shipping Weight | 8.1lb / 3.7kg | 9.5lb / 4.3kg | | 36lb / 16kg | |
| Other Features | Calibrate in kg or lb, calibration lock via internal switch | | | | |

*Calibration weights not included


Compliance

- **Safety and EMC:** UL/CSA (adapter), FCC, CE Safety EN60950, EMC EN61326
- **Quality:** OHAUS quality management system registered to ISO 9001:2008

Distributed by:

NELSON JAMESON INC.
800-826-8302 nelsonjameson.com

Outline Dimensional Drawings

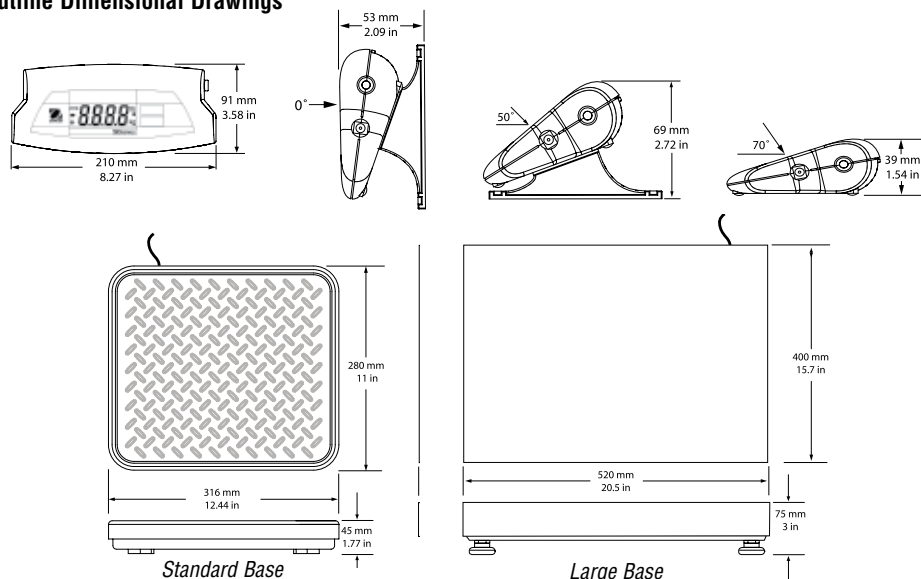

80774281_D © Copyright Ohaus Corporation

