

SecureFit™ 200 Series

Description

Stylish, lightweight design weighs less than 1 oz. Features proprietary 3M™ Pressure Diffusion Temple (PDT) Technology that helps diffuse pressure over the ear to enhance frame comfort while not compromising the security of fit across a diverse workforce.

Key Features

- Pressure Diffusion Temple (PDT) technology
- Absorbs 99.9% UVA and UVB
- Wrap-around lens design
- Non-removable nose piece
- Weighs less than 1 oz.



| Product Number | 3M I.D. Number | UPC | Description |
|----------------|----------------|--------------------|--|
| SF201AF | 70-0716-7625-1 | 1-00-78371-65717-5 | 3M™ SecureFit™ Protective Eyewear SF201AF, Clear anti-fog lens |
| SF201AS | 70-0716-9525-1 | 1-00-78371-65720-5 | 3M™ SecureFit™ Protective Eyewear SF201AS, Clear anti-scratch lens |
| SF-FOAM | 70-0716-7534-5 | 5-00-51131-27476-6 | 3M™ SecureFit™, Replacement Foam Gasket, SF-FOAM, 20/bag |




| Approximate Weight | |
|--------------------------------|-----------------------------|
| Eyewear | 18 g (0.63 oz) |
| Gasket | 6 g (0.2 oz) |
| Approximate Physical Dimension | |
| Lens (Top) | 140 mm |
| Material Composition | |
| Lens/nosepad | Polycarbonate (clear) |
| Temple | Xylex |
| Temple Hinge | Stainless steel screw (top) |
| Gasket | Nylon/EVA |

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)
- CSA Z94.3 (Z94.3)

Representative Transmittance Spectrum (200 - 2000 nm)

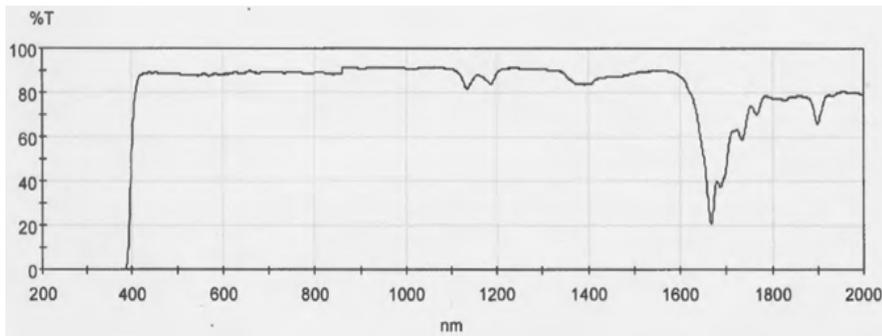

| ANSI Z87.1 Transmittance Requirement Classification | |
|---|-----------|
| Visible Light Filter (380 - 780 nm) | L3 |
| Ultraviolet Filter (200 - 380 nm) | U6 |
| Infrared Filter (780 - 2000 nm) | Not rated |
| Welding Filter | Not rated |

Other Noted Ratings

- Impact: Z87+

Storage

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

| Product Number | 3M I.D. Number | UPC | Description |
|----------------|----------------|--------------------|---|
| SF202AF | 70-0716-9523-6 | 1-00-78371-65718-2 | 3M™ SecureFit™ Protective Eyewear SF202AF, Grey anti-fog lens |
| SF202AS | 70-0716-9526-9 | 1-00-78371-65721-2 | 3M™ SecureFit™ Protective Eyewear SF202AS, Grey anti-scratch lens |
| SF-FOAM | 70-0716-7534-5 | 5-00-51131-27476-6 | 3M™ SecureFit™, Replacement Foam Gasket, SF-FOAM, 20/bag |




| Approximate Weight | |
|--------------------------------|-----------------------------|
| Eyewear | 18 g (0.63 oz) |
| Gasket | 6 g (0.2 oz) |
| Approximate Physical Dimension | |
| Lens (Top) | 140 mm |
| Material Composition | |
| Lens/nosepad | Polycarbonate (gray) |
| Temple | Xylex |
| Temple Hinge | Stainless steel screw (top) |
| Gasket | Nylon/EVA |

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)
- CSA Z94.3 (Z94.3)

Representative Transmittance Spectrum (200 - 2000 nm)

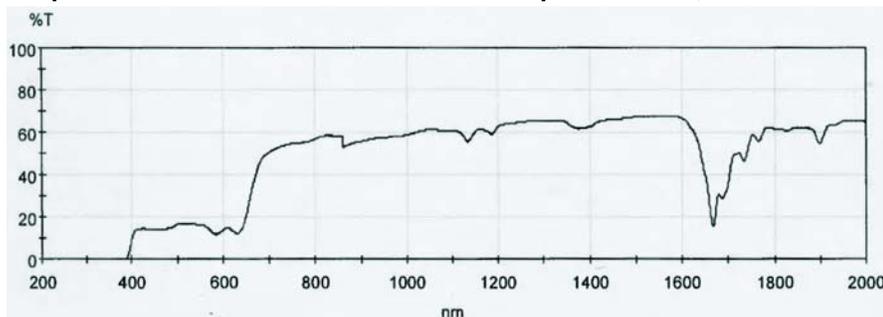

| ANSI Z87.1 Transmittance Requirement Classification | |
|---|-----------|
| Visible Light Filter (380 - 780 nm) | L3 |
| Ultraviolet Filter (200 - 380 nm) | U6 |
| Infrared Filter (780 - 2000 nm) | Not rated |
| Welding Filter | Not rated |

Other Noted Ratings

- Impact: Z87+

Storage

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

| Product Number | 3M I.D. Number | UPC | Description |
|----------------|----------------|--------------------|--|
| SF203AF | 70-0716-9524-4 | 1-00-78371-65719-9 | 3M™ SecureFit™ Protective Eyewear SF203AF, Amber anti-fog lens |
| SF203AS | 70-0716-9527-7 | 1-00-78371-65722-9 | 3M™ SecureFit™ Protective Eyewear SF203AS, Amber anti-scratch lens |
| SF-FOAM | 70-0716-7534-5 | 5-00-51131-27476-6 | 3M™ SecureFit™, Replacement Foam Gasket, SF-FOAM, 20/bag |




| Approximate Weight | |
|--------------------------------|-----------------------------|
| Eyewear | 18 g (0.63 oz) |
| Gasket | 6 g (0.2 oz) |
| Approximate Physical Dimension | |
| Lens (Top) | 140 mm |
| Material Composition | |
| Lens/nosepad | Polycarbonate (gray) |
| Temple | Xylex |
| Temple Hinge | Stainless steel screw (top) |
| Gasket | Nylon/EVA |

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)
- CSA Z94.3 (Z94.3)

Representative Transmittance Spectrum (200 - 2000 nm)

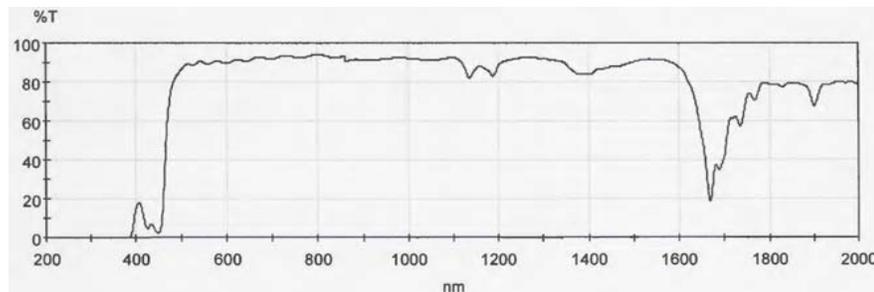

| ANSI Z87.1 Transmittance Requirement Classification | |
|---|-----------|
| Visible Light Filter (380 - 780 nm) | Not rated |
| Ultraviolet Filter (200 - 380 nm) | U6 |
| Infrared Filter (780 - 2000 nm) | Not rated |
| Welding Filter | Not rated |

Other Noted Ratings

- Impact: Z87+

Storage

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

i IMPORTANT NOTE

Before use, the wearer must read and understand the User Instructions provided as part of the product packaging.



3M PSD products are occupational use only.

© 3M 2017. All rights reserved.
3M and SecureFit are trademarks of 3M.
Used under license in Canada.
All other trademarks are property of their respective owners.
Please recycle. Release 1, July 2017

Distributed by:



800-826-8302 nelsonjameson.com