


## **SANI-LAV**

### **Operating Manual for Three-Person Hands-Free Floor Mounted Wash Stations Models 56FAL and 56FBL**




Columbia does not recommend use with harsh chemicals.  
NSF/ANSI Standard 2 - Food Equipment and NSF/ANSI 372 low-lead.


■ [Top](#)

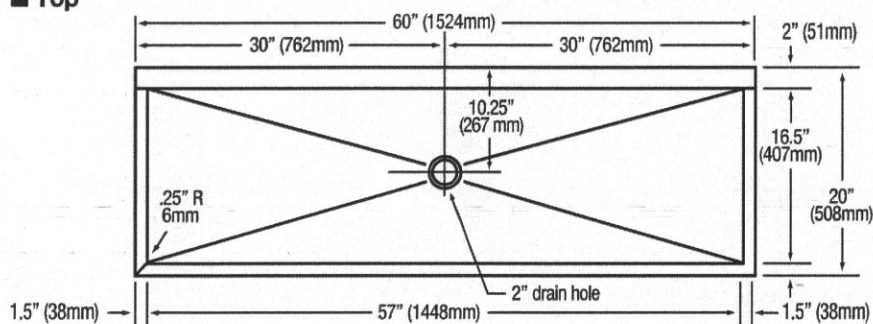


## ■ Front

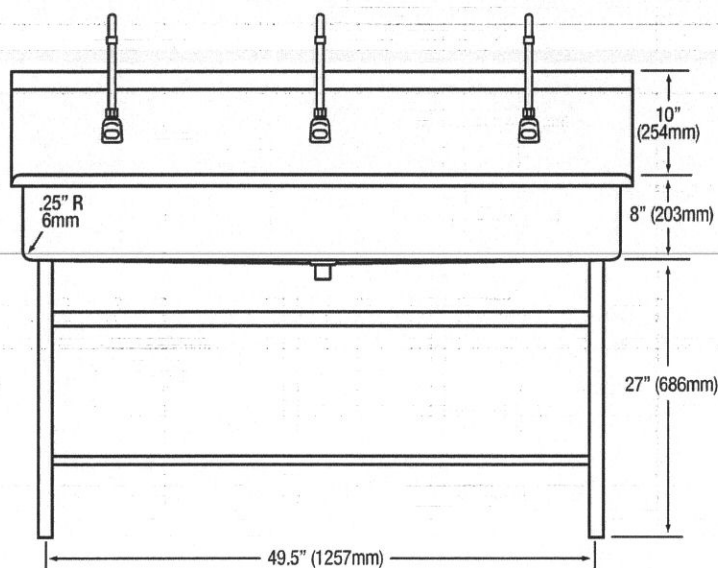


## ■ Hole Configurations

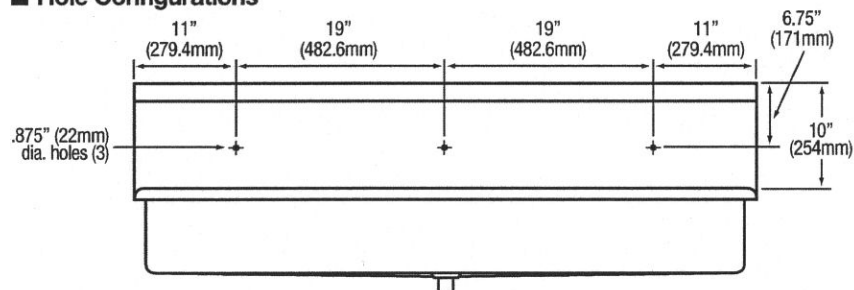

## ■ Side

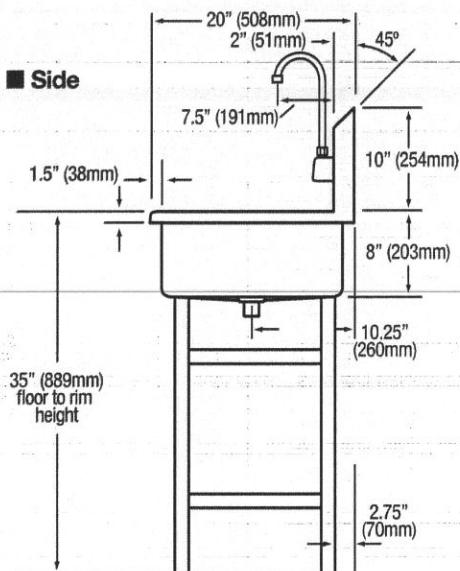

## ■ Leg Specifics

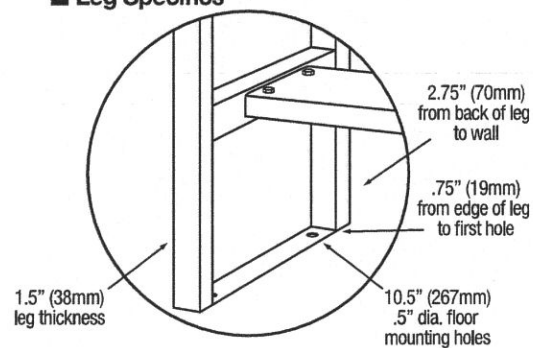



# Solid Brass AC or Battery Powered Automatic Faucet

6700C Series

ISO 9002 Certified

## High Technology For No Touch Operation

- ADA Compliant. Meets all barrier free codes
- Conserves water and energy
- Easily installed in new or retrofit applications
- Competitively priced for today's commercial market
- Promotes cleanliness & hygiene
- Proven Hydrotek craftsmanship and reliability




**6700C Series**  
U.S. Patent: 6192530B1

## Features:

- **ACCU-SENSE** adjustable sensor eyes.
- Chrome plated, solid brass construction.
- Wall mountable, waterproof control box with armored, vandal resistant control and power cables.
- Preset/adjustable sensor range 6" - 30" for various installation requirements.
- Standard automatic time-out feature. Preset at 0 but adjustable to 15, 30 or 60 seconds. Prevents accidental sink overflow.
- Shut-off delay is adjustable from 1 second (preset) to 8 seconds.
- Includes in-line filters with clean-out trap to reduce maintenance costs.
- Standard 6" gooseneck spout and 2.0 GPM laminar flow control.
- Single-hole, wall/splash mounting.
- All parts are field replaceable to ensure quick and easy repair.
- Same faucet, field switchable to/from AC Powered or Battery Powered.
- Slow closing, piston-operated solenoid valve provides reliable and smooth operation without water hammer.
- Superior VSI silicone elastomer piston seals are unaffected by chlorine, chloramines or ammonia.
- Control module automatically performs a unique self-check of all electrical components.
- No-touch system enhances hygiene in the medical, institutional, food service industries, etc.



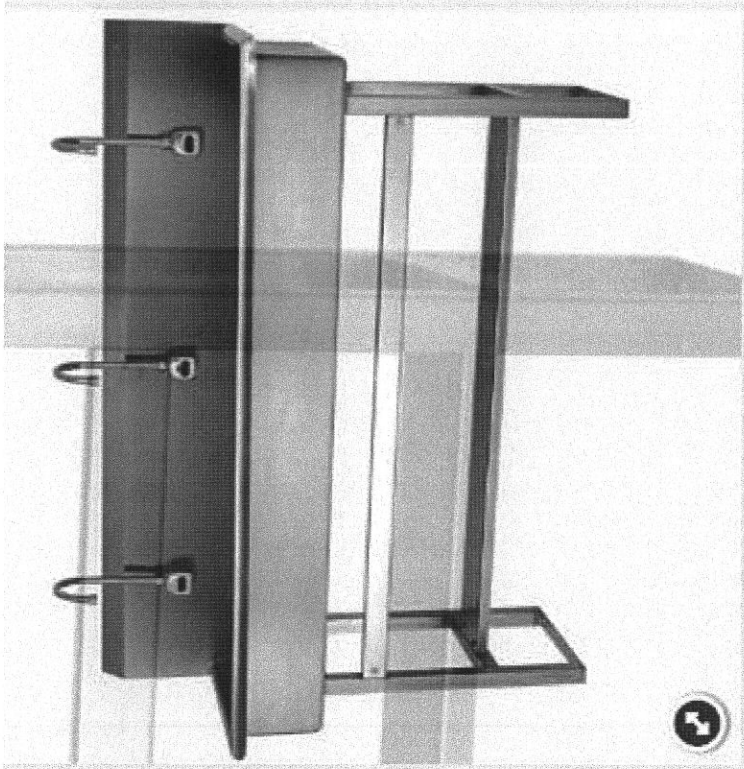

COMPARE

Low-flow models available

Model 56FAL-0.5 – 0.5 gpm flow rate

Model 56FBL-0.5 – 0.5 gpm flow rate

[Download Manual](#)

Constructed from welded #16 gauge type 304 stainless steel. The front, bottom and back are formed from a single sheet with a rolled rim on front and sides. Exposed surfaces have a blended uniform satin finish.

#### Includes:

- (1) Three-person floor mount wash station – Model 56FAL or 56FBL
- (1) Leg assembly set
- (4) Washers and nuts for connection sink to leg assembly set
- (3) AC or Battery powered sensor faucet assembly
- (1) Strainer assembly with basket – Model 1010
- (3) Mixing check valve – Model 201L

56FAL is AC Powered and 56FBL is Battery Powered.

| Quick Specs        | 56FAL and 56FBL                     |
|--------------------|-------------------------------------|
| Outside Dimensions | 60" x 20" x 45" High                |
| Inside Bowl Size   | 57" x 16-1/2" x 8" Deep             |
| Back Splash height | 10"                                 |
| Water Activation   | AC or Battery Powered Sensor Faucet |
| Flow Rate          | 2 gpm                               |
| Inlet Connections  | 3/8" Male Compression               |
| Drain Opening      | 2"                                  |
| Finish             | Satin                               |
| Strainer           | 1-1/2" dia. clin-joint connection   |