

# Aqua-Pure®

Spec # \_\_\_\_\_

Quantity \_\_\_\_\_

## Models:

**SST1 / SST1HA / SST2HB**

**Whole House Filters**

## Applications:

- Chlorine Taste & Odor
- Sediment
- Scale

## At a Glance:

- Housings rated for hot and cold water applications up to 200°F (93°C)
- Various inlet/outlet configurations and sizes available to help maximize flow rates with minimal pressure drop



**SST1HA**

**SST2HB**

**SST1**


## Product Benefits:

- 304 stainless steel housing with 316 cast stainless steel head helps provide maximum strength and durability with very high operating pressure rating (See specification section on page 2 for details)
  - Especially suitable for applications where solenoid valves are used
- Accepts a wide variety of cartridges, from 1 to 50 micron nominal, to help provide a solution for most water conditions
- “Sure-Seal” ring nut connector with tightening tool helps enable positive cartridge sealing and easy cartridge change-out

## Product Specifications:


Model No. (Part No.)	Pipe Size	Dimensions		Approx. Weight	Flow Rate	Max. Water Temp.	Max. Water Pressure	Replacement Ctg. Qty.	Degree of Filtration
		Height	Diameter						
SST1 (55271-04)	3/8" NPT Vertical	12-1/32" (30.6 cm)	4-5/32" (10.6 cm)	4.8 lbs. (2.2 kg)	8 gpm (30.3 lpm)	200°F (93°C)	300 psi (2,068 kPa)	1	1 - 50 Micron
SST1HA (55920-01)	3/4" NPT In-line							1	
SST2HB (55920-10)	1" NPT In-line	22-5/16" (56.7 cm)		7 lbs. (3.2 kg)	16 gpm (60.6 lpm)			2	

# Aqua-Pure®

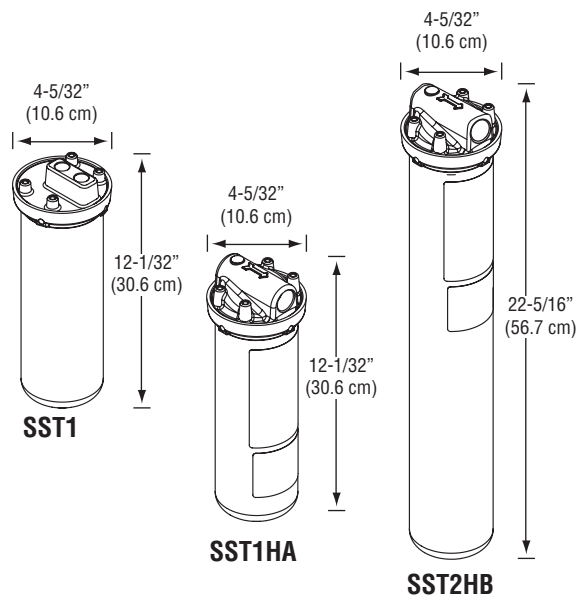

## Easy Installation:

**CAUTION:** Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

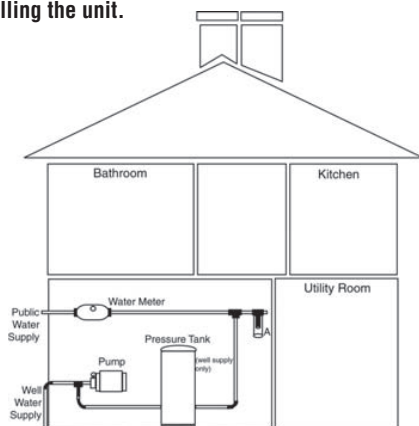

Spec #

Quantity

Model Number

Part Number

## Physical Specifications:

- SST1 and SST1HA have a flow rate of 8 gpm (30.3 lpm). SST2HB has a flow rate of 16 gpm (60.6 lpm)
- System is manufactured from FDA CFR-21 compliant materials
- System has a maximum operating pressure of 300 psi (2,068 kPa) and operating temperature of 200°F (93°C). System maximum operating pressure and operating temperature are dependant upon the temperature and pressure rating of the cartridge selected.
- System can accommodate unique scale stopper cartridges
- System can accommodate unique progressive porosity sediment reduction pre-filters

Model	Load	Nominal Micron Rating	Application			Flow Rate
			Sediment/ Rust	Chlorine Taste & Odor	Scale	
AP1001	Extra Fine	1	•			8 gpm (30.3 lpm)
AP1003	Fine	3	•			8 gpm (30.3 lpm)
AP110*	Normal	5	•			8 gpm (30.3 lpm)
AP124*	Heavy	50	•			8 gpm (30.3 lpm)
AP117*	Normal	5	•	•		3 gpm (11.4 lpm)
APS117*	Normal	5	•	•	•	3 gpm (11.4 lpm)
AP420*	Normal	5	•		•	8 gpm (30.3 lpm)

\* Install on cold water line only.

**⚠ WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. For liquid applications only.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **Change the filter cartridge at least every 6 months. Improper installation and maintenance may result in property damage due to water leakage.**

## Limited Warranty:

CUNO Incorporated warrants this Product (excluding disposable filter cartridge(s)) to be free from defects in material and workmanship for one (1) year from the date of purchase. The disposable filter cartridge is warranted from defects in material and workmanship for a period of one (1) year from the date of purchase. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by CUNO or failure to follow installation and use instructions. If the Product is defective CUNO will replace the Product or refund your Product purchase price. CUNO will not be liable for any indirect, special, incidental, or consequential damages arising from the use of this Product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. To obtain warranty service, mail your request to Warranty Claims, CUNO Incorporated, 400 Research Parkway, Meriden, CT 06450. Proof of purchase (original sales receipt) must accompany the warranty claim, along with a complete description of the Product, model number and alleged defect. This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

Distributed by:

Distributed by:  
**NELSON JAMESON**  
 INC.  
 800-826-8302 nelsonjameson.com

**CUNO**  
 a 3M company

**3M**

CUNO Incorporated

3M is a trademark of 3M Company.  
 CUNO and Aqua-Pure are trademarks of 3M Company used under license.  
 © 2009 3M Company. All rights reserved.  
 LITAP771 0609  
 70-0201-9281-4