



STAINLESS STEEL
WALL SHELVES 



Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____



FEATURES:

Brackets can be positioned to accommodate wall studs.
 Furnished with a 1-5/8" Bullnose edge with a 1-1/2" turn-up edge at rear. Ends are turned down square.

MATERIAL:

16 Gauge Series - 304 stainless steel polished to a satin finish.
18 Gauge Series - 430 stainless steel polished to a satin finish.

CONSTRUCTION:

Secured to wall by means of bolts through support brackets.
 Units 7 ft. and larger are furnished with 3 brackets.

L	10" Wide			12" Wide			15" Wide			18" Wide			
	16 Ga.	18 Ga.	Approx. Wt.	16 Ga.	18 Ga.	Approx. Wt.	16 Ga.	18 Ga.	Approx. Wt.	16 Ga.	18 Ga.	Approx. Wt.	Approx. Cu. Ft.
24"	WS-10-24-16	WS-10-24	8 lbs.	WS-12-24-16	WS-12-24	9 lbs.	WS-15-24-16	WS-15-24	11 lbs.	WS-18-24-16	WS-18-24	14 lbs.	3
36"	WS-10-36-16	WS-10-36	10 lbs.	WS-12-36-16	WS-12-36	12 lbs.	WS-15-36-16	WS-15-36	15 lbs.	WS-18-36-16	WS-18-36	21 lbs.	4
48"	WS-10-48-16	WS-10-48	12 lbs.	WS-12-48-16	WS-12-48	14 lbs.	WS-15-48-16	WS-15-48	18 lbs.	WS-18-48-16	WS-18-48	24 lbs.	5
60"	WS-10-60-16	WS-10-60	15 lbs.	WS-12-60-16	WS-12-60	17 lbs.	WS-15-60-16	WS-15-60	23 lbs.	WS-18-60-16	WS-18-60	28 lbs.	6
72"	WS-10-72-16	WS-10-72	17 lbs.	WS-12-72-16	WS-12-72	21 lbs.	WS-15-72-16	WS-15-72	28 lbs.	WS-18-72-16	WS-18-72	32 lbs.	7
84"	WS-10-84-16	WS-10-84	20 lbs.	WS-12-84-16	WS-12-84	25 lbs.	WS-15-84-16	WS-15-84	32 lbs.	WS-18-84-16	WS-18-84	36 lbs.	8
96"	WS-10-96-16	WS-10-96	23 lbs.	WS-12-96-16	WS-12-96	28 lbs.	WS-15-96-16	WS-15-96	36 lbs.	WS-18-96-16	WS-18-96	42 lbs.	10
108"	WS-10-108-16	WS-10-108	28 lbs.	WS-12-108-16	WS-12-108	32 lbs.	WS-15-108-16	WS-15-108	40 lbs.	WS-18-108-16	WS-18-108	48 lbs.	11
120"	WS-10-120-16	WS-10-120	32 lbs.	WS-12-120-16	WS-12-120	36 lbs.	WS-15-120-16	WS-15-120	44 lbs.	WS-18-120-16	WS-18-120	54 lbs.	12
132"	WS-10-132-16	WS-10-132	36 lbs.	WS-12-132-16	WS-12-132	42 lbs.	WS-15-132-16	WS-15-132	49 lbs.	WS-18-132-16	WS-18-132	60 lbs.	13
144"	WS-10-144-16	WS-10-144	40 lbs.	WS-12-144-16	WS-12-144	48 lbs.	WS-15-144-16	WS-15-144	55 lbs.	WS-18-144-16	WS-18-144	66 lbs.	14




800-826-8302 nelsonjameson.com

DETAILS and SPECIFICATIONS

TOL ± .500"


ALL DIMENSIONS ARE TYPICAL

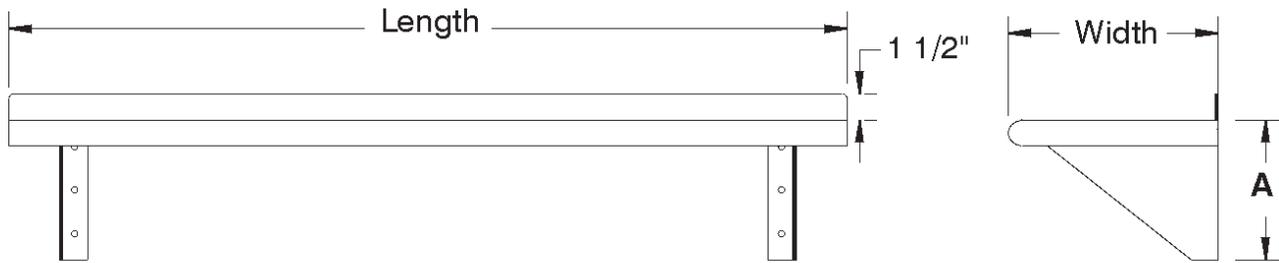

Width	A
10"	8 1/2"
12"	10 1/2"
15"	13 1/2"
18"	16 1/2"

Wall Shelf Options

PRT-1	Printer Shelf
TA-22A	Square Edge Shelf
TA-26	Welded Shelf Brackets
TA-49	Wall Shelf 2" Offset
TA-71	Heat Lamp Provision
TA-77	Check Minder
TA-77A	Concealer for Heat Lamp (Requires TA-77)
TA-99A	14 Ga. S/S 304 Upgrade for Overshelves
TA-100A	Bullnose Edge On All 4 Sides of Shelf
TA-102	6" Cantilever Shelf Offset



Requirements for NSF Installations

1. Install at least 60" above floor.
2. Limit to dry storage.
3. Avoid contact with liquids.
4. For "Ganging-Up" installation, allow at least 2" between units or mount units side by side and seal joints with an approved sealant.

