

DUNLOP®

PUROFORT FIELDPRO FULL SAFETY (DUNLOP GREEN/BLACK)

Purofort powers you on, fits like a sneaker

Protection & Comfort

- Fit perfected with Dunlop's innovative Snug-fit construction to eliminate heel slippage
- The trusted choice for farm and industry professionals
- S5 & EN ISO 20345:2011 certified steel toe cap and mid-plate

Shaft / Upper

- Lightweight and flexible Purofort helps keep your feet fresh until the job is done
- Durable Purofort outlasts the competition
- Cut and abrasion resistant Purofort guarantees long lasting protection

Outsole

- SRC rated Professional outsole designed for excellent grip in the field
- With tread wear indicator to monitor outsole performance
- Outsole channels move mud and water out to atmosphere for safety in every step




WWW.DUNLOPB00TS.COM

ARTICLE EG62E33



PUROFORT®
THE ORIGINAL

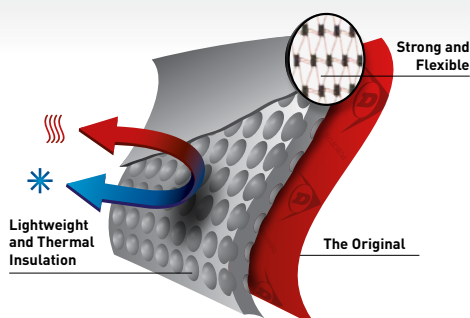

Additional information

| | |
|-----------------|---|
| Number of sizes | 14 |
| Size range EUR | 35-48 |
| Size range UK | 02-13 |
| Size range US | 03-14 |
| Safety standard | EN ISO 20345:2011 S5 CI CR SRC ASTM F2413-18 M/I/C PR Mt |

Creation date: August 02, 2021

PROTECTION AND COMFORT YOU DESERVE

Dunlop Purofort FieldPRO full safety (Dunlop green/black) (EG62E33)

Purofort powers you on, fits like a sneaker



USP's outsole

SRC rated Professional outsole designed for excellent grip in the field

USP's shaft/upper

Lightweight and flexible Purofort helps keep your feet fresh until the job is done

USP's safety

Fit perfected with Dunlop's innovative Snug-fit construction to eliminate heel slippage

General

| | |
|---------------------|------------------------|
| Segment | Agriculture |
| Material boot shaft | Purofort® |
| Material outsole | Purofort® |
| Color boot shaft | Heritage green |
| Color outsole | Black |
| Lining | Red branded lining |
| Insole type | Dunlop Basic PU insole |

Certification

| | |
|------------------------|--------------------------------|
| Safety standard Europe | EN ISO 20345:2011 S5 CI CR SRC |
| Safety standard USA | ASTM F2413-18 M/I/C PR Mt |

Distributed by:



800-826-8302 nelsonjameson.com

Protection & Comfort

| | |
|------------------------|--------|
| Toe cap | Steel |
| Midsole | Steel |
| Slip resistant outsole | SRC |
| Oil resistant outsole | Yes |
| Cold insulation (°C) | -20 °C |
| Cold insulation (°F) | -4 °F |
| Energy absorbing | Yes |
| Fuel oil resistant | Yes |

Sizing

| | |
|----------------|-------|
| Size range EUR | 35-48 |
| Size range UK | 02-13 |
| Size range US | 03-14 |

Logistics

| | |
|-------------------|----------|
| Country of origin | NL |
| Intrastat code | 64011000 |

| SKU | Size EUR | Size US | Size UK | GTIN | Prs/Outer pack | Outer pack length (mm) | Outer pack width (mm) | Outer pack height (mm) | Prs/Pallet | Pallet height (m) |
|------------|----------|---------|---------|---------------|----------------|------------------------|-----------------------|------------------------|------------|-------------------|
| EG62E33.35 | 35 | 3 | | 8713197051695 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.36 | 36 | 4 | | 8713197051701 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.37 | 37 | 5 | 4 | 8713197051718 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.38 | 38 | 6 | 5 | 8713197051725 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.39 | 39 | 7 | 6 | 8713197051732 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.40 | 40 | | 10½ | 8713197051749 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.41 | 41 | 8 | 7 | 8713197051756 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.42 | 42 | 9 | 8 | 8713197051763 | 6 | 800 | 380 | 337 | 90 | |
| EG62E33.43 | 43 | 10 | 9 | 8713197051770 | 6 | 790 | 445 | 359 | 60 | |
| EG62E33.44 | 44 | 11 | 10 | 8713197051787 | 6 | 790 | 445 | 359 | 60 | |
| EG62E33.45 | 45 | | 6½ | 8713197051794 | 6 | 790 | 445 | 359 | 60 | |
| EG62E33.46 | 46 | 12 | 11 | 8713197051800 | 6 | 790 | 445 | 359 | 60 | |
| EG62E33.47 | 47 | 13 | 12 | 8713197051817 | 6 | 790 | 445 | 359 | 60 | |
| EG62E33.48 | 48 | 14 | 13 | 8713197051824 | 6 | 790 | 445 | 359 | 60 | |

Creation date: August 02, 2021

PROTECTION AND COMFORT YOU DESERVE