

DulcoFlex DFB 16 - Data Sheet



Capacity: .024 g/rev
Connections: 3/4" MNPT
Max Pressure: 116 psi
Rotor system: Rollers





Available Hoses: NR, NBR, EPDM, Hypalon, NR-A, NBR-A
Available Tubes: Norprene, Tygon

Technical data

Description	Material	Surface Treatment
Pump housing	Aluminium EN-AC-44100	Polyester powder coated Halar coated (Optional)
Front cover	Polycarbonate	
Rotor	Nodular Cast Iron EN-GJL-400	Cataphorisis
Rollers	Steel F-114	Blueing
Base plate	Stainless Steel AISI-304	Halar coating (optional)
Connections	Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	

DulcoFlex DFB 16

DFB 16 Flow Rates

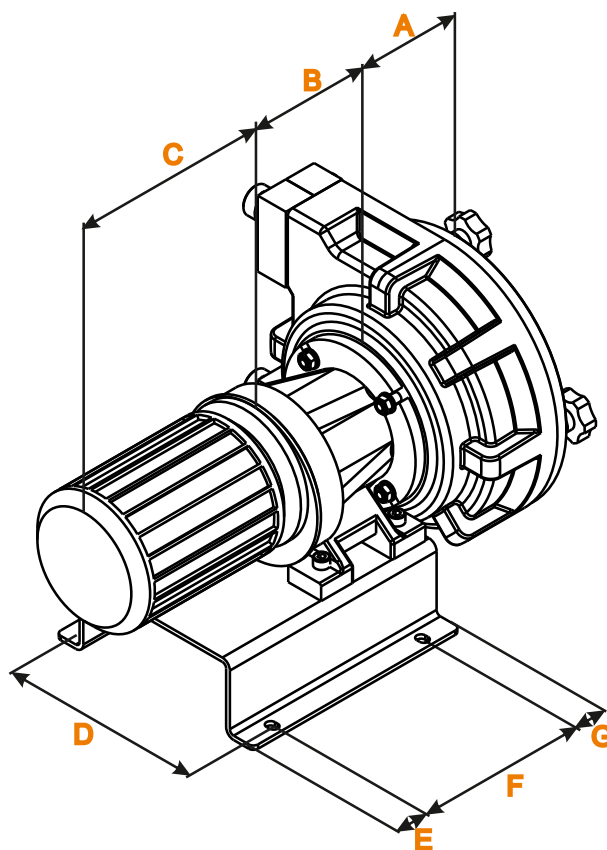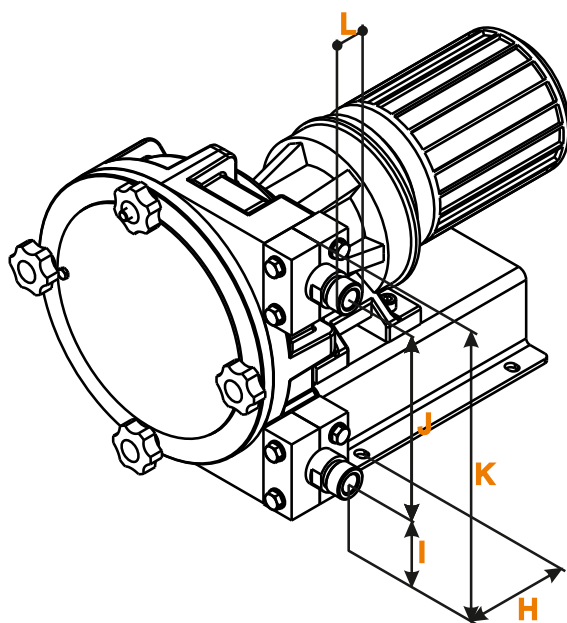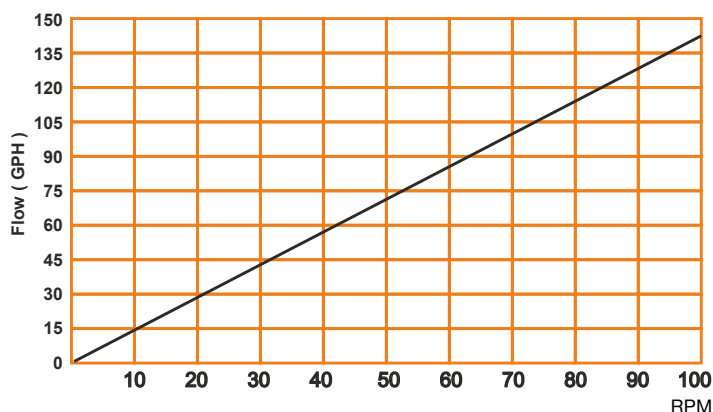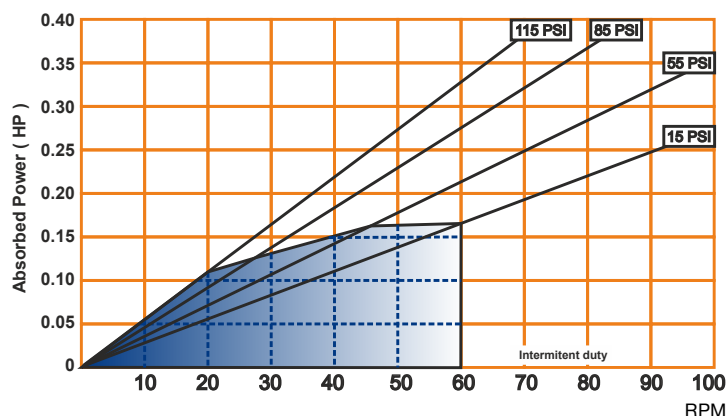

Bare pump weight 28.6 lbs

A	B	C	D	E	F	G	H	I	J	K	L
4.6"	*	*	7.5"	1.2"	6.3"	1.2"	3"	2.4"	6.7"	10.4"	3/4"

* TBD Based on motor & gear selection

ProMinent®

ProMinent Fluid Controls, Inc.

136 Industry Drive • Pittsburgh, PA 15275 USA

(412) 787-2484 • Fax: (412) 787-0704

email: sales@prominent.us • www.prominent.us

© 2017 ProMinent Fluid Controls, Inc. All Rights Reserved.

PN: 7750607
DulcoFlex_DFB_16.indd rev0 01/05/2017