

**CRANE**<sup>®</sup>

**brands you trust.**



**CRANE<sup>®</sup> - Bronze Valves**

**CRANE**<sup>®</sup>

Energy Flow Solutions

[www.craneenergy.com](http://www.craneenergy.com)

## Key Features & Applications



### Key Features & Benefits

- ❶ Full Pressure Class offering: Class 125, Class 150, Class 200, Class 300, 200 CWP, and 300 CWP.
- ❷ Highly specified and proven performer for commercial and industrial piping applications.
- ❸ Wide option range seats, discs, trims, and connection type.

### Typical Applications

- General Services Plumbing
- Commercial Plumbing and HVAC
- Industrial Plumbing and HVAC
- Utility Applications
- Marine

# Bronze Valve Selection Guide & Figure Number Index

Cross Reference .....	4
General Data .....	5
Materials .....	6
Ratings .....	7
Pressure-Temperature Ratings and Flow Data .....	8

CRANE® Figure No.	Catalog Page No.	Pressure Rating	Stem: RS or NRS	Bonnet/Cap: TB, UB, SC, UC	End Connections	Disc
<b>Bronze Gate Valves</b>						
<b>428</b>	9	Class 125	RS	TB	THD	SW
<b>428UB</b>	10	Class 125	RS	UB	THD	SW
<b>438</b>	11	Class 125	NRS	TB	THD	SW
<b>1324</b>	12	300 CWP	NRS	TB	SLD	SW
<b>429</b>	13	Class 150	NRS	TB	FLGD	SW
<b>431</b>	14	Class 150	RS	TB	THD	SW
<b>431UB</b>	15	Class 150	RS	UB	THD	SW
<b>437</b>	16	Class 150	NRS	TB	THD	SW
<b>1320</b>	17	200 CWP	NRS	TB	SLD	SW
<b>1330</b>	18	200 CWP	RS	TB	SLD	SW
<b>422</b>	19	Class 200	RS	UB	THD	SW
<b>424</b>	20	Class 200	RS	UB	THD	SW (SS Seat)
<b>622E</b>	21	Class 300	RS	UB	THD	SW
<b>634E</b>	22	Class 300	RS	UB	THD	SW (SS Seat)
<b>636E</b>	23	Class 300	NRS	UB	THD	SW (SS Seat)
<b>Bronze Globe Valves</b>						
<b>1</b>	24	Class 125	RS	TB	THD	BRZ
<b>5TF</b>	25	Class 125	RS	TB	THD	PTFE
<b>7TF</b>	26	Class 150	RS	UB	THD	PTFE
<b>1310</b>	27	300 CWP	RS	TB	SLD	PTFE
<b>14 ½P</b>	28	Class 150	RS	UB	THD	SS
<b>212P</b>	29	Class 200	RS	TB	THD	SS
<b>88</b>	30	Class 200	RS	TB	THD	Needle
<b>382P</b>	31	Class 300	RS	UB	THD	SS
<b>Bronze Angle Valves</b>						
<b>17TF</b>	32	Class 150	RS	UB	THD	PTFE
<b>89</b>	33	Class 200	RS	TB	THD	Needle
<b>384P</b>	34	Class 300	RS	UB	THD	SS
<b>Bronze Swing Check Valves: Y- Pattern</b>						
<b>37</b>	35	Class 125		SC	THD	BRZ
<b>41TF</b>	36	Class 125		SC	THD	PTFE
<b>137</b>	37	Class 150		SC	THD	BRZ
<b>1342</b>	38	300 CWP		SC	SLD	BRZ
<b>141TF</b>	39	Class 150		SC	THD	PTFE
<b>36</b>	40	Class 200		SC	THD	BRZ
<b>1340</b>	41	200 CWP		SC	SLD	BRZ
<b>76E</b>	42	Class 300		SC	THD	BRZ
<b>Bronze Lift Check Valves</b>						
<b>27TF</b>	43	Class 150		UC	THD	PTFE
<b>366E</b>	44	Class 300		UC	THD	BRZ
<b>Bronze Swing Check Valves: Horizontal Pattern</b>						
<b>1707</b>	45	Class 125		TB	THD	BRZ
<b>1707S</b>	46	200 CWP		TB	SLD	BRZ
<b>Bronze Lead Free Valves</b>						
<b>LF438</b>	48	200 CWP	NRS	TB	THD	SW
<b>LF1320</b>	49	200 CWP	NRS	TB	SLD	SW
<b>LF1340</b>	50	200 CWP			SLD	
<b>LF37</b>	51	200 CWP			THD	

## General Data

Advanced manufacturing techniques and equipment, ongoing engineering research and product development, skilled craftsman, and over fourteen decades of experience in flow control are behind the quality and dependability built into every CRANE® product.

This catalog presents some of these products, namely: bronze gate, globe and check valves. The information is presented in a comprehensive manner and includes material, construction, rating, principal dimensions, and weight data.

### Hydrostatic and Shock Pressures

CRANE® valves are suitable for liquid working pressures specified on catalog pages only when used in hydraulic installations in which shock is absent or negligible. The sudden closure of a valve in a hydraulic system causes the body of liquid, which may be moving at a rate generally in excess of one foot per second, to stop instantaneously. As liquids are relatively incompressible, the sudden cessation of flow effects a rise in pressure considerably greater than the static working pressure. This pressure increase is termed "SHOCK" and may, in some cases, be sufficient to cause valves or piping to fail.

Pressure increase due to shock is not dependent upon the working pressure in the system but rather upon the velocity at which the liquid is flowing. This pressure surge severely limits design velocities; a fact readily understandable if it is remembered that pressure rise resulting from arrest of flow may be as high as 60 psi for each foot per second initial velocity. For example, installations of 100 psi and 1000 psi working pressures, with the same initial velocity of 10 feet per second, will be subject to the same increase in pressure (approximately 600 psi) due to instantaneous closure of a valve.

Shock generally prevails in lines equipped with check or quick-closing valves, or in lines supplied by reciprocating pumps. It may also be produced, to a lesser degree, by rapid closure of gate and globe valves. Therefore, care should be exercised when choosing valves installed in liquid lines.

Where shock is likely to occur, the maximum shock pressure should be added to the working pressure of the line to determine working pressure products in the line. In addition, hydraulic installations should be equipped with air chambers or other types of shock absorbers to eliminate, as much as possible, increase due to shock.

### Testing

Bronze valves described in this section meet or exceed the MSS SP-80 specifications for testing.

### Materials

The selection of materials for components of CRANE® valves is based upon expert metallurgical, engineering, foundry, and fabrication knowledge as well as on many years of usage experience. Considerations affecting materials of parts which come in contact with the conveyed fluid include pressure, temperature, and chemical composition of the fluid. The materials of moving parts that are subject to rubbing contact are selected on the basis of their resistance to wear, corrosion, seizing or galling, and on their frictional characteristics.

Utilization of materials to their full capability is assured by the use of stress analysis techniques that include extensive laboratory testing as well as the application of analytical theory. Stress levels for all materials used are maintained within the levels established by applicable codes, standards, and specifications.

### Illustrations & Weights

This catalog shows equivalent metric values to the customary imperial units. The "soft" conversion was found by following MSS SP-86 guidelines.

**Illustrations** – Catalog illustrations are representative of a certain size of each line of product but do not necessarily represent all sizes in all details.

**Material & design** – We reserve the right to institute changes in materials, designs, dimensions, and specifications without notice in keeping with our policy of continuing product development.

**Weights** – shown are approximate and are not guaranteed. They represent the average weight of CRANE® valves products as made from patterns in use at time weights were compiled.

# CRANE® Copper Alloys

CHEMICAL REQUIREMENTS (%) MECHANICAL PROPERTIES															
	Copper	Tin	Lead	Iron	Nickel	Manganese	Aluminum	Zinc	Silicon	Other	Tensile Strength		Yield Strength		Elongation in 2" (50mm)
	Cu	Sn	Pb	Fe	Ni	Mn	Al	Zn	Si		ksi	MPa	ksi	MPa	(%)
STEAM OR VALVE BRONZE CASTINGS															ASTM B61, C92200
Min.	86.0	5.5	1.0					3.0			34	235	16	110	24
Max.	90.0	6.5	2.0	0.25	1.0		0.005	5.0	0.005	0.05*					
COMPOSITION BRONZE CASTINGS															ASTM B62, C83600
Min.	84.0	4.0	4.0					4.0			30	205	14	95	20
Max.	86.0	6.0	6.0	0.30	1.0		0.005	6.0	0.005	0.05*					
COPPER-ZINC SILICON ALLOY ROD															ASTM B371, C69400
Min.	80.0							remainder	3.5		80	550	40	250	15
Max.	83.0		0.30	0.20					4.5						
LEADED SEMI-RED BRASS															ASTM B584, C84400
Min.	78.0	2.3	6.0					7.0			29	200	13	90	18
Max.	82.0	3.5	8.0		1.0		0.005	10.0	0.005						
SILICONE BRASS CASTINGS															ASTM B584, C87600
Min.	88.0							4.0	3.5		60	414	30	207	16
Max.			0.50					7.0	5.5						
FREE CUTTING BRASS ROD/BAR															ASTM B16, C36000, H02
Min.	60.0		2.5					remainder			+	+	+	+	+
Max.	63.0		3.7	0.35						0.50**	+	+	+	+	+
NAVAL BRASS ROD															ASTM B16, C48200, H02
Min.	59.0	0.5	0.4					remainder			+	+	+	+	+
Max.	62.0	1.0	1.0	0.15						0.10**	+	+	+	+	+
ALUMINUM SILICONE BRONZE ROD															ASTM B150, C64200
Min.	87.5						6.3		1.5		+	+	+	+	+
Max.	92.5	0.20	0.05	0.30	0.25	0.10	7.6	0.50	2.2	0.50***	+	+	+	+	+
LEADED RED BRASS CONTINUOUS CASTINGS															ASTM B505, C83600
Min.	84.0	4.0	4.0					4.0			36	248	19	131	15
Max.	86.0	6.0	6.0	0.30	1.0		0.005	6.0	0.005						
BRASS PLATE/SHEET STRIP															ASTM B36, C26000, H04
Min.	68.5							remainder			71	489			
Max.	71.5		0.07	0.05							81	558			
BRASS WIRE															ASTM B134, C26000, H02
Min.	68.5							remainder			57	395			
Max.	71.5		0.07	0.05							67	460			
ALUMINUM SILICONE BRONZE FORGINGS															ASTM B283, C64200
Min.	88.7						6.3		1.5		+	+	+	+	+
Max.	90.1	0.20	0.05	0.30	0.25	0.10	7.6	0.50	2.2	0.15***	+	+	+	+	+
COPPER SILICON ALLOY ROD/BAR															ASTM B98, C65100, H02
Min.	96.0								0.80		55	379	20	138	11
Max.			0.05	0.08		0.7		1.5	2.00						
SEAMLESS COPPER WATER TUBE															ASTM B88, C12200
Min.	99.9										30	207			
Max.															

\* Also may include maximum of 0.05% phosphorus.

\*\* Maximum percent of elements permissible other than those indicated.

\*\*\* Also may include maximum of 0.15% arsenic.

+ Depends on diameter or thickness (surface to surface) of material: data on request.

# Introduction to Ratings

A) Ratings for Class 125, 150, 200, and 300 bronze valves are indicated on page 8 in this catalog:

- PSI Steam, Basic Rating; i.e., the nominal rated pressure of the valve.
- PSI Cold Working Pressure; i.e., the maximum rated pressure of the valve at a temperature range of -20° to 150°F (-30° to 65°C).

B) Ratings for Class 125 and 150 bronze valves equipped with non-metallic discs are indicated on the relevant catalog pages in this manner:

- PSI Saturated Steam; where "Saturated Steam" is the maximum rated pressure of the valve at the corresponding temperature of saturated steam.
- PSI Cold Working Pressure; where "Cold Working Pressure" is the maximum rated pressure of the valve at a temperature range of -20°F to 150°F (-30°C to 65°C).

The full range of allowable pressures and temperatures for these valves is determined by referring to the Pressure-Temperature charts shown on page 8.

C) Ratings for bronze valves falling outside Class 125, 150, 200, and 300 are indicated in various ways on the relevant catalog pages. The full range of allowable pressures and temperatures for these valves is determined by referring to the relevant catalog page.

## General

All ratings represent the maximum allowable non-shock pressure at the indicated temperature. If the temperature is different from indicated, the allowable pressure may be interpolated.

## Rating Temperature

The operating temperature of the valve is considered the temperature of the media flowing through it. This temperature must not exceed the maximum allowable temperature as stated in the Pressure-Temperature chart on page 8.

The safe Pressure-Temperature rating of a solder joint piping system is dependent, not only on valve, fitting, and tubing strength but also on the composition of the solder used for joints. It shall be the responsibility of the user to select a solder composition that is compatible with the service conditions.

The safe Pressure-Temperature rating of valves fitted with non-metallic discs (some Globe, Angle Valves and Check Valves) is dependent upon the composition of the disc material. It shall be the responsibility of the user to specify the service application. PTFE discs are suitable for a maximum service temperature of 400°F (200°C), nitrile composition discs are suitable for a maximum service temperature of 200°F (90°C).

## Adjusted Pressure-Temperature Ratings

Joints Made of Copper Tube and Solder End Valves (pounds per square inch) Extracted from MSS SP-80

Solder used in joints	Service Temperature Degrees F	Water, including other noncorrosive liquids and gases			Saturated Steam
		Valve Sizes			(psig)
		¼" - 1"	1 ¼" - 2"	2 ½" - 4"	Valves Sizes ¼" - 4"
50-50 Tin-Lead (ASTM B-32, Alloy Grade 50-A)	100	200	175	150	-
	150	150	125	100	-
	200	100	90	75	-
	250	85	75	50	15
95-5 Tin-Antimony	100	500	400	300	-
	150	400	350	275	-
	200	300	250	200	-
	250	200	175	150	15

# Pressure-Temperature Ratings

IMPERIAL UNITS						
Press. Class	125	150		200	300	
End Conn.	THD	THD	FLG	THD	THD**	FLG
Temp °F	<b>PRESSURE – PSI NON-SHOCK</b>					
	ASTM B-62			ASTM B-61		
	200	300	225	400	1000	600
-20 to 150	200	185	270	210	375	920
200	170	240	195	350	830	525
250	155	210	180	325	740	490
300	140	180	165	300	650	450
350	–	–	–	275	560	410
400	125	150	150	–	–	–
406	120*	145*	–	250	480	375
450	–	–	–	225	390	340
500	–	–	–	200	300	300
550	–	–	–	–	–	–

METRIC UNITS						
Press. Class	125	150		200	300	
End Conn.	THD	THD	FLG	THD	THD**	FLG
Temp °C	<b>PRESSURE – kPa NON-SHOCK</b>					
	ASTM B-62			ASTM B-61		
	1380	2070	1550	2760	6890	4140
-30 to 70	1280	1860	1450	2590	6340	3860
90	1170	1660	1340	2410	5720	3620
120	1070	1450	1240	2240	5100	3380
150	970	1240	1140	2070	4490	3100
180	–	–	–	1800	3860	2830
200	860	1030	1030	–	–	–
208	830*	1000*	–	1720	3310	2590
230	–	–	–	1550	2690	2340
260	–	–	–	1380	2070	2070
290	–	–	–	–	–	–

\* Some codes (i.e. ASME BPVC, Section 1) limit the rating temperatures of the indicated material to 406°F (208°C).

\*\* Alternative ratings for valve size 1/8" - 2" having threaded ends and union bonnet, when so indicated on the relevant catalogue pages.




## Technical Data: Flow Data (Cv Values)

The flow coefficient Cv expresses flow rate in usg per minute of water at 60°F, with 1.0 psi pressure drop across the valve.

<b>Bronze Gate Valves</b>	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
All	–	8	8	16	36	60	90	140	270	470	680
<b>Globe and Angle Valves</b>											
17TF	–	1.6	3.1	5.1	9.2	16	28	39	66	–	–
382P	–	1.1	2.1	3.3	6.0	10	18	26	44	64	100
384P	–	1.5	3.0	4.9	9.0	15	27	38	64	–	–
1310	–	–	2.1	3.8	5.9	11	21	28	49	–	–
7TF, 14 1/2P, 212P	–	1.3	2.4	3.9	7.0	12	21	30	50	74	115
<b>Check Valves</b>											
29	–	1.3	2.5	4.1	7.6	13	23	31	54	78	125
27TF	–	0.9	1.8	3.0	5.4	9	16	22	39	–	–
366E	–	1.1	2.1	3.3	6.0	10	18	26	44	64	100
76E, 137, 1342, 141TF	–	2.3	4.3	7.2	13	22	39	56	92	135	215
<b>Miscellaneous</b>											
88, 89	0.3	0.6	1.1	1.9	3.4	–	–	–	–	–	–

Class 300 • Union Bonnet\* • Plug-Type Disc • Renewable SS Seats

# 382P Globe Valve

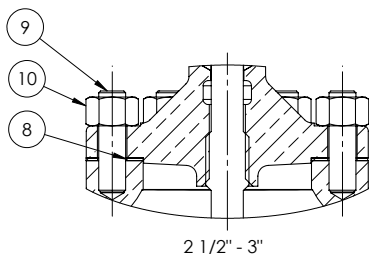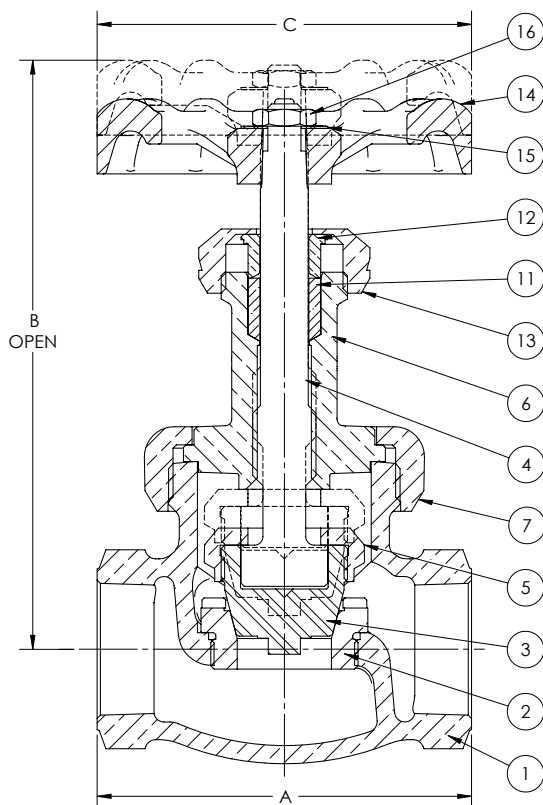

## Materials of Construction

No.	Description	Material	ASTM Spec.
1	Body	Bronze	B-61 C92200
2	Body Seat Ring	Stainless Steel	AISI 420 SS
3	Disc	Stainless Steel	AISI 420F SS
4	Stem	Bronze	B-371 C69400
5	Disc Stem Ring	(1/4" - 3/4") Brass	B-16 H02
		(1" - 3") Bronze	B-61 C92200
6	Bonnet	(1/4" - 3/8") Brass	B-16 H02
		(1/2" - 3") Bronze	B-61 C92200
7	Union Bonnet Ring	Bronze	B-61 C92200
8	Gasket	Synthetic/Glass Fiber with Nitrile Binder	
9	Stud	Steel Cadmium	A-109 C1145
10	Nut	Mild Steel	A-563 Gr-A
11	Packing	Graphite (Asbestos Free)	Type 11
12	Gland	Brass	B-16 H02
13	Packing Nut	Brass (1/4 1 1/2")	B-16 H02
		Bronze (2-3")	B-61 C92200
14	Handwheel	Cast Iron	
		Ductile Iron	
15	ID Tag	Aluminum	
16	Lock Nut	Steel Cadmium	

See page 8 for Pressure-Temperature Ratings.

### Industry Standards

MSS SP-80, Type 3

## Dimensions and Weights

Inches (millimeters) - Pounds (kilograms)

Valve Size	Dimensions			Wt.
	B	C	A	
1/4	4.47	2.76	1.94	0.97
	(114)	(70)	(49)	(0.44)
3/8	4.47	2.76	1.94	0.95
	(114)	(70)	(49)	(0.43)
1/2	4.06	2.76	2.56	1.36
	(103)	(70)	(65)	(0.62)
3/4	4.98	2.76	2.96	2.20
	(127)	(70)	(75)	(1.00)
1	5.59	4.02	3.50	3.50
	(142)	(102)	(89)	(1.59)
1 1/4	6.48	4.02	4.02	4.93
	(165)	(102)	(102)	(2.24)
1 1/2	6.85	4.02	4.58	6.86
	(174)	(102)	(116)	(3.12)
2	7.39	4.76	5.70	12.83
	(188)	(121)	(145)	(5.83)
*2 1/2	9.68	5.51	7.24	23.58
	(246)	(140)	(184)	(10.7)
*3	11.02	5.98	8.50	34.83
	(280)	(152)	(216)	(15.8)

\* 2 1/2" and 3" have Bolted Bonnet

Distributed by:

NELSON

JAMESON

INC.

800-826-8302 nelsonjameson.com