

PIPETITE® REBOOT

Pipetite® forms a flexible, sanitary seal that allows for pipeline movement. Its self-sealing design and flexibility eliminate the headaches that come with metal wall plates. Pipetite ReBoot is designed specifically for easy installation around existing piping. Its split design allows the installer to wrap the boot around existing piping then to seal it closed. The unique Pipetite base design incorporates self-sealing ridges that provide excellent surface contact, eliminating the need for caulks and sealants.

Pipetite can easily be adapted to fit most pipe or tube diameters, and superior flexibility allows the pipe to move significantly without breaking the seal.

Pipetite ReBoot fits tube or pipe with an outer diameter of 0 to 15 inches.

PIPETITE

Pipetite is a global leader in sanitary sealing solutions for tube and pipe penetrations.




ReBoot

[Shop Now](#)

INDUSTRIES

Processed Foods, High-Acid Foods, Dairy, Beverages, Brewery, Home & Personal Care, Pharmaceutical, Biotech, Chemical

DIMENSIONAL DATA

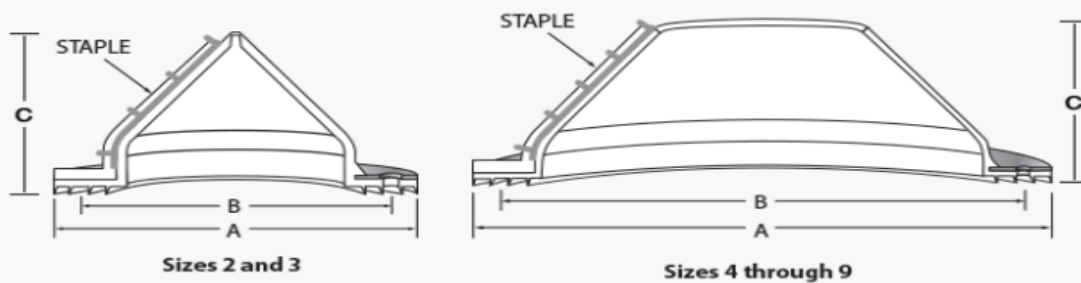

Size	Tube OD (in)	A (in)	B (in)	C (in)*	# of Anchors Needed	Item #
2	0.00 - 2.50	4.17	3.58	2.36	4	PTR2-000
3	0.00 - 3.74	5.79	5.04	3.07	6	PTR3-000
4	2.76 - 5.31	7.36	6.61	2.52	6	PTR4-000
5	3.94 - 7.09	9.33	8.39	3.15	10	PTR5-000
7	4.92 - 10.83	13.28	12.25	5.12	14	PTR7-000
9	6.50 - 15.00	19.31	18.39	7.87	20	PTR9-000

Bolt holes are 0.177 inches in diameter.

Sizes 2 and 3 are full cones. Sizes 4 through 9 are not available as full cones.

*Max height

Distributed by:

NELSON JAMESON
INC.
800-826-8302 nelsonjameson.com

FEATURES

- Available in six sizes to fit up to 15 inch OD pipe or tube
- Innovative split design installs easily around existing piping
- Easily trimmed to size
- Flexible seal allows movement without damage or loss of seal
- Totally self-sealing—no sealant required
- Predrilled for quick and easy installation with no messy clean-up
- Materials compatible with cleaning solution

TECHNICAL DATA

Materials	Hygienic white silicone 316 stainless steel
Tube OD size range	0 – 15 inch
Temperature (min)	-40°F
Temperature (max)	500°F